


MICROPOWER ZINC-CARBON BATTERY

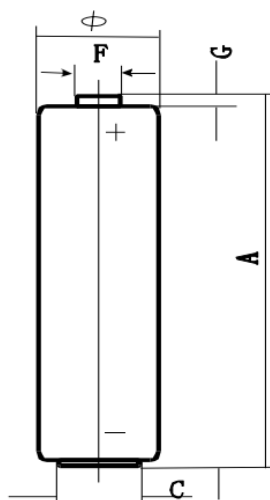

Size: AAA/ R03, 1.5V

**Dimensions(GB):**

- ϕ : 9.8~10.5mm
- A: 43.5~44.5mm
- C: \geq 4.3mm
- F: \leq 3.8mm
- G: \geq 0.8mm

Dimensions(GB)

PHYSICAL CHARACTERISTICS

- Chemical System Zn/ ZnCl₂-NH₄Cl-H₂O/MnO₂
- Typical weight 7.0g
- Jacket PVC Label
- Heavy Metal Contents 0% Hg & Cd
- Reference document:
IEC60086-1,-2,- 5: 2015, GB/T8897. 1.2-2013,
GB8897.5-2013

CERTIFICATES

- CE
- IEC60086
- RoHS
- MSDS
- KC
- Air Transportation Certificate
- Sea Transportation Certificate

ELECTRICAL CHARACTERISTICS

- Capacitance: Approximate 180mAh (3.9 Ω , 24h/d, 20 \pm 2 $^{\circ}$ C, e.v.=0.9V)
- Typical Voltage (at + 20 $^{\circ}$ C) 1.5 V

TYPICAL APPLICATIONS

- Medical Devices
- Industrial Devices
- Infrastructure Devices
- Life Safety Devices

OPERATING & STORAGE CONDITIONS

- Operating temperature range -20 $^{\circ}$ C to 54 $^{\circ}$ C
- Recommended Storage (storage area should be clean, cool, dry, and ventilated) 5 $^{\circ}$ C to 30 $^{\circ}$ C



This data is subject to change. Performance information is typical. Contact Us for the latest information.

Phone: +86-512-67610171 / +86-15952405898

Email: sales3@micropowerbattery.com

Website: www.micropower-battery.com